

LCD Touch monitor with VGA,HDMI



LED Backlight



RESOLUTION:
Up to 1920×1440



RESOLUTION:
1024*768 pixels




Touch Panel

4-wire 5-wire

USB RS232

Interface Description

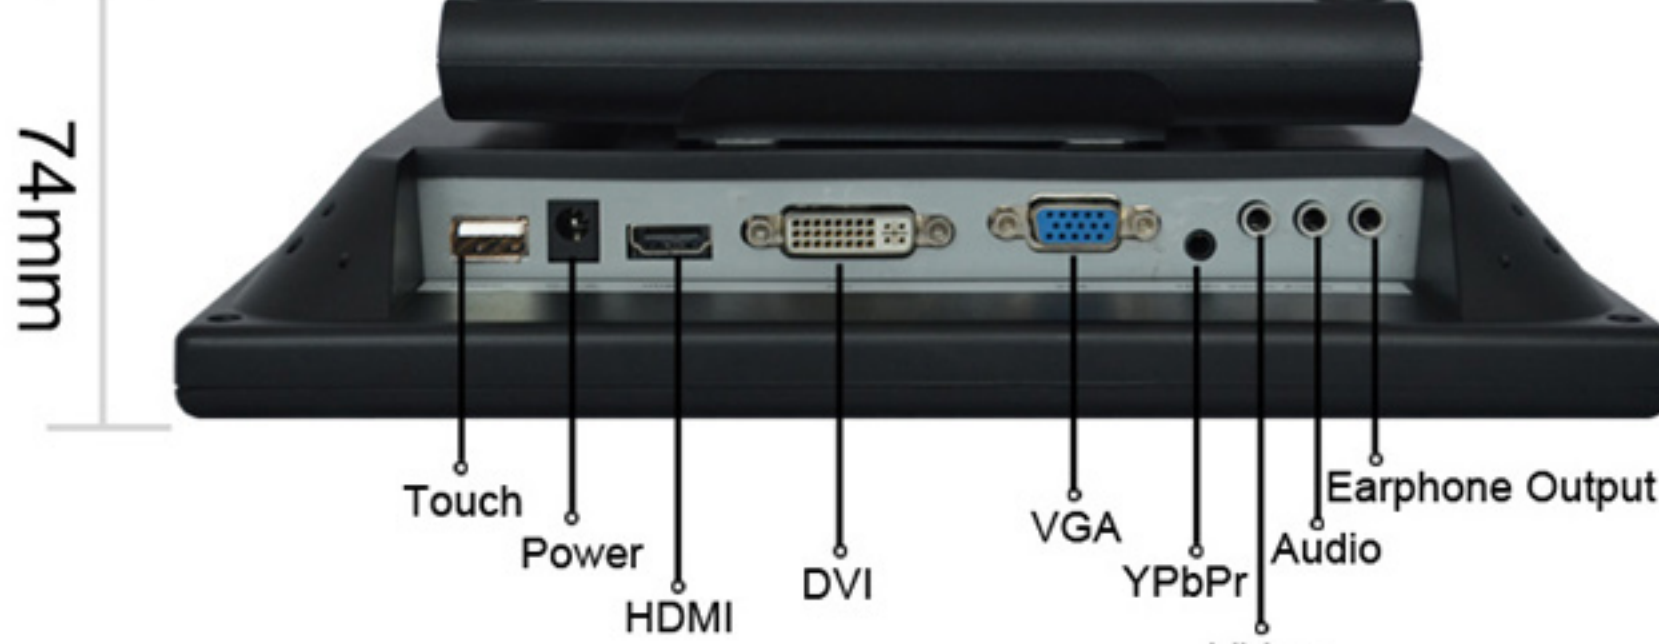

Specification

Model	SD100AHT
Panel Display Ratio	4:3
Description	10" LCD Touch Monitor with VGA,HDMI
Backlight	LED
Resolution	1024x768
Resolution Up To	1920x1440
Brightness	250cd/m ²
Contrast Ratio	600:1
Viewing Angle	75°/75°(L/R) 60°/70°(U/D)
Response Time	5ms
Horizontal Frequency Range	30-98KHz
Field Frequency Range	60Hz ~ 75Hz
Distance	0.198 (H) x 0.198 (V)
Touch Panel	4-Wire Resistive Touch Panel (USB/RS232) 5-Wire Resistive Touch Panel (optional)
Input Single	VGA,VIDEO,AUDIO,YPbPr,HDMI,DVI
Install Way	Folding Bracket (VESA 75*75mm)
Input Voltage	DC9-15V
Power Consumption	≦7W
Working Temperature	-20℃~60℃
Store Temperature	-30℃~70℃
Unit Size	252L×216W× 74H (folding) 252L×185W×296H (stretch) (mm)
Unit Weight	1152 g

252mm



185mm

Accessories



Home power adapter



Video cable




USB cable



VGA cable



Remote controller & touch pen



Operation manual



Touch driver disc



Audio cable