

TFT LCD Touch \HDMI\Ypbpr\VGA IAV Monitor




LED Backlight

RESOLUTION:
Up to 1920×1440




RESOLUTION:
1024×600

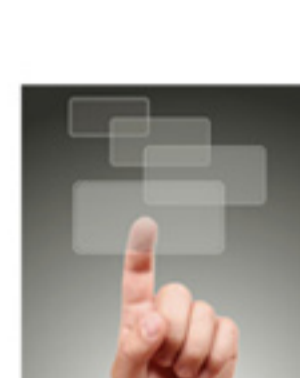

Touch Panel:

- 4-Wire Resistive Touch Panel (USB/RS232)
- 5-Wire Resistive Touch Panel (optional)

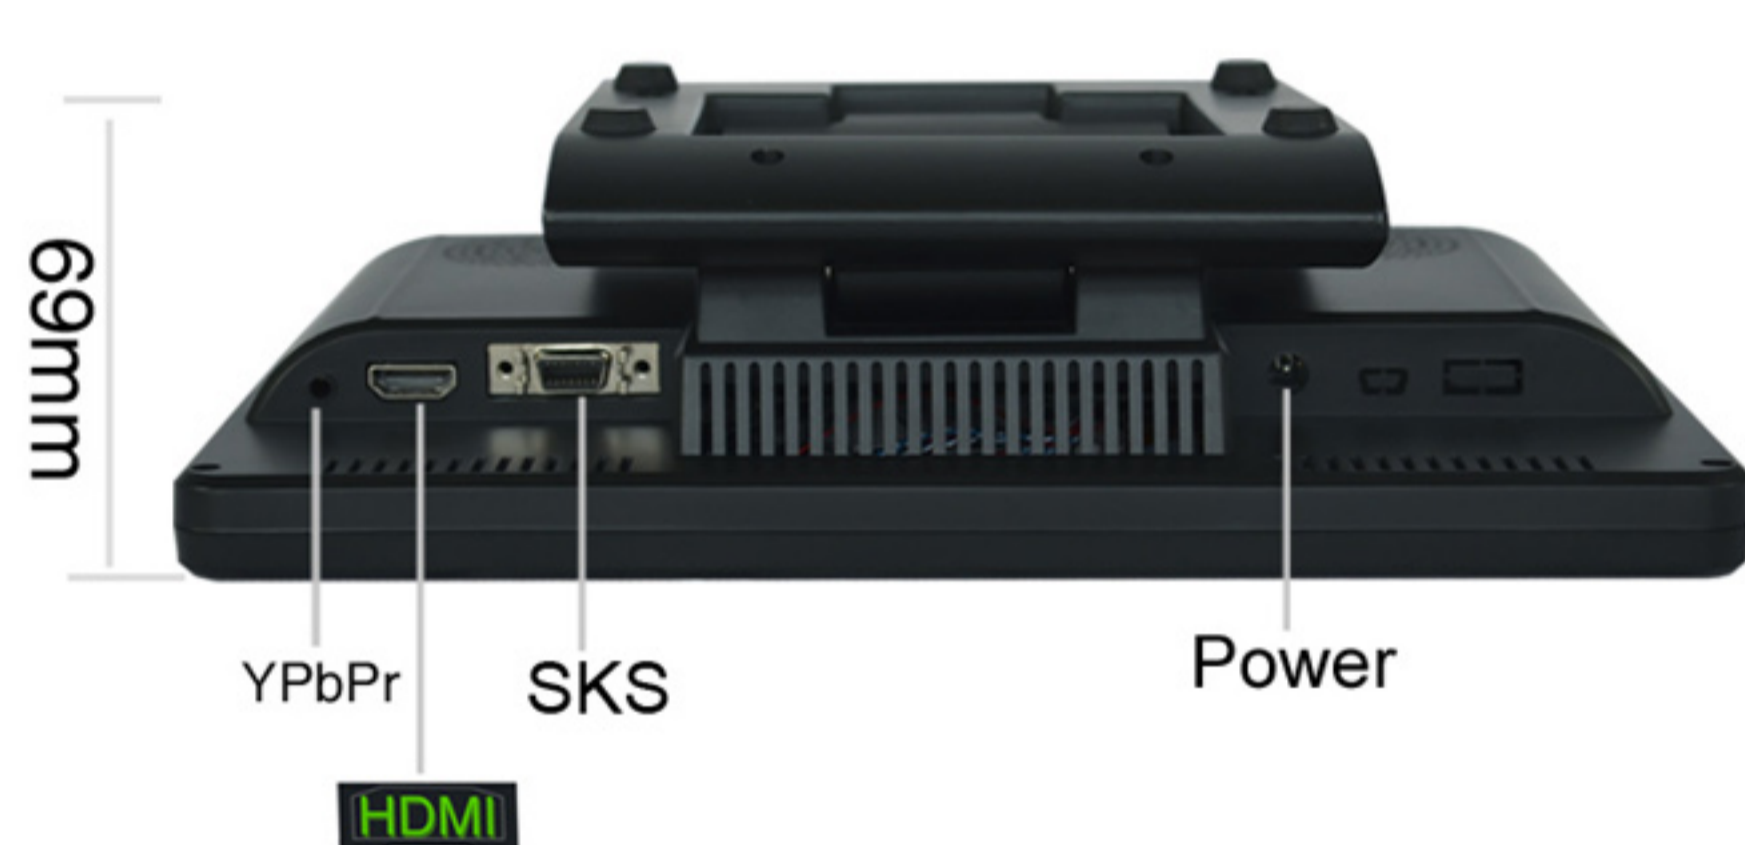

Specification

Model:	SD101AHT
Panel Size:	10.1"
Panel Type:	TFT LCD
Horizontal Frequency Range:	30-60kHz
Field Frequency Range:	60Hz ~ 75Hz
Dot Pitch:	0.2175 × 0.2175 mm
Display Ratio:	16:9
Brightness :	200cd/m ² (400cd/m ² optional)
Contrast Ratio:	500:1
Viewing Angle:	45°/45° (L/R) 15°/35° (U/D)
Response Time:	8ms
Input Voltage:	DC 9-15V
Video Color System:	PAL-4.43; NTSC-3.58
Input Single:	VGA,AV1,AV2,AUDIO,HDMI,Y/Pb/Pr
Install Way:	Folding Bracket (Support VESA 75*75mm)
HDMI & YPbPr Supported Format:	480i、480p、576i、576p、720p、1080i、1080p (50/60Hz)
Power Consumption:	≅6W
Working Temperature:	- 20~50℃
Store Temperature:	- 30~65℃
Unit Size:	255(L)*163(W)*69(H)(Unfolding) 255(L)*150(W)*236(H) (Folding)
Unit Weight:	1040g



Accessories



Home Power Adapter



VGA Cable



Remote Controller



SKS Cable



Operation Manual