

# LCD Touch monitor with VGA,HDMI



## LED Backlight



**RESOLUTION:**  
Up to 1920×1440



**RESOLUTION:**  
800\*600 pixels




### Touch Panel

**4-wire    5-wire**

**USB      RS232**

### Interface Description

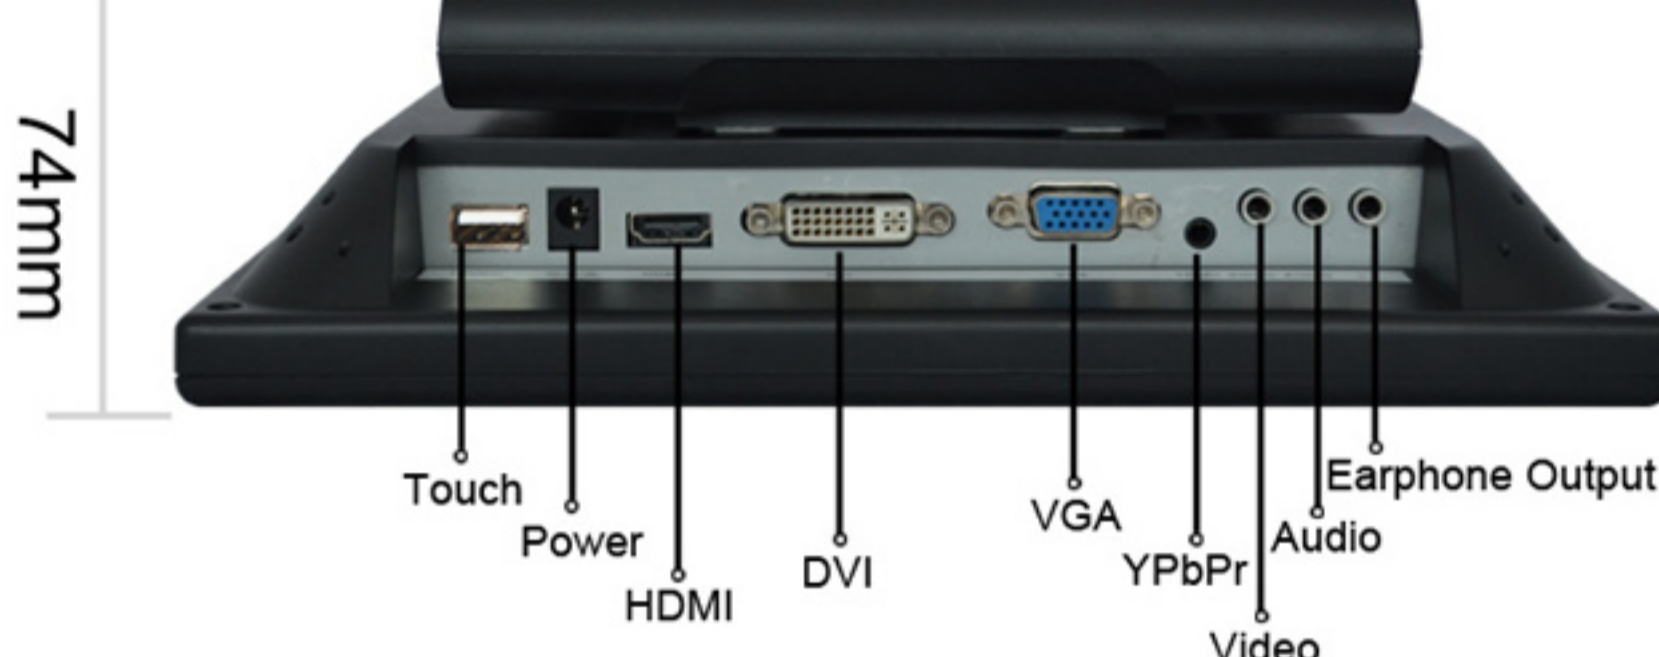

### Specification

|                            |   |
|----------------------------|---|
| Model                      | SD1042AHT   |
| Panel Display Ratio        | 4:3   |
| Description                | 10" LCD Touch Monitor with VGA,HDMI   |
| Backlight                  | LED   |
| Resolution                 | 800x600   |
| Resolution Up To           | 1920x1440   |
| Brightness                 | 250cd/m <sup>2</sup>  |
| Contrast Ratio             | 500:1   |
| Viewing Angle              | 75°/70°(L/R) 50°/60°(U/D)   |
| Response Time              | 5ms   |
| Horizontal Frequency Range | 30-98KHz  |
| Field Frequency Range      | 60Hz ~ 75Hz   |
| Distance                   | 0.088 (H) x 0.264 (V)   |
| Touch Panel                | 4-Wire Resistive Touch Panel (USB/RS232)<br>5-Wire Resistive Touch Panel (optional) |
| Input Single               | VGA,VIDEO,AUDIO,YPbPr,HDMI,DVI  |
| Install Way                | Folding Bracket (VESA 75*75mm)  |
| Input Voltage              | DC9-15V   |
| Power Consumption          | ≦7W   |
| Working Temperature        | -20℃~60℃  |
| Store Temperature          | -30℃~70℃  |
| Unit Size                  | 252L×216W× 74H (folding)<br>252L×185W×296H (stretch) (mm)                           |
| Unit Weight                | 1520g   |

252mm



185mm

### Accessories



Home power adapter



Video cable



USB cable



VGA cable



Remote controller & touch pen



Operation manual



Touch driver disc



Audio cable